

Technical Data

KSS Safety Certification :

	UL Recognized Product Marks for USA & Canada
	UL Recognized Component Marks for USA & Canada
	VDE Prüf- und Zertifizierungsinstitut
	Lloyd's Register Marine and Shipping
	Det Norske Veritas & Germanischer Lloyd
	American Bureau of Shipping
	European Conformity
	UK Conformity Assessed

KSS Storage and Application :

KSS Cable ties are made by high quality Nylon 66 resin. The property of this material is absorb and release of moisture. Cable ties require to be contained the moisture and packed in the sealed packaging to maintain optimal performance. Hence, the conditions for keeping the packaging of cable ties are very important.

APPLICATION:

	The ideal storage temperature is around 23°C with the humidity over 50 %
	Do not open the bag before use. Please try to finish the whole package of cable ties shortly once it's opened. Seal the bag for remaining pieces to keep quality.
	Do not expose directly under sunlight except UV resistant cable ties.
	Avoid storing cable ties next to warm objects like heaters.

Technical Data

KSS cable tie is EN45545-2 certified


EN45545-2 is a safety requirement set up by EU for fire protection of railway vehicles. With complicated and massive cable system equip on railway vehicle, material performance on burning behavior, heat release rate, smoke density and toxicity is utmost important to ensure safety. For cable ties application area respectively to internal R22 and external R23, and assigning degrees of fire hazard from low to high as HL1, HL2 and HL3.



KSS cable tie is certificated with level below:

Application Area	UV Resistant (CV-W)	Heat Stabilized (CV-HS)	Flame Retardant (CV-V0)
R22	HL2	HL2	HL1
R23	HL2	HL2	HL2


KSS Cable Tie Standard Bag

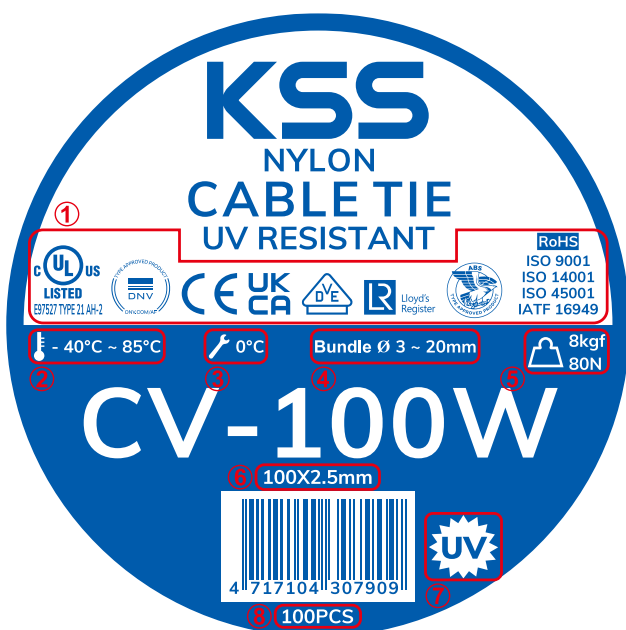

- ① Certificates- See page 247 for detail info.
- ② Operating temp.- Sustainable temp. range after installation.
- ③ Min. installation temp.- Minimum temp. when installation.
- ④ Bundle diameter range
- ⑤ Min. loop tensile strength- Test according to UL62275
- ⑥ Dimension- Length x Width
- ⑦ UV resistant
- ⑧ packing quantity

0301 KSS NYLON CABLE TIE

- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Color: Standard color is natural, black, other special colors are available upon request.
- Feature: Low Smoke and Halogen Free cable tie suitable for various industry, also household DIY and gardening.
Max. operating temperature up to 85°C
- Application: One piece self-lock cable tie save the time and make effective for installation.

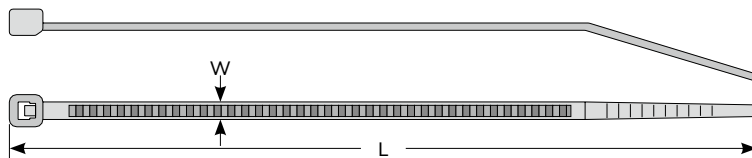

Item No.				Length		W	Max. Bundle Dia.	Min. LoopTensile Strength			
Natural		Black						lbs	kgs		
100pcs	1000pcs	100pcs	1000pcs	mm	inch						
※CVT-070	CVT-070K	CVT-070B	CVT-070KB	71	2 13/16"	1.6	11	7	3		
※CVT-100	CVT-100K	CVT-100B	CVT-100KB	103	4"	1.95	22	11	5		
CV-060	CV-060K	CV-060B	CV-060KB	63.7	2 1/2"	2.4	11	18	8		
CV-075	CV-075K	CV-075B	CV-075KB	75	3"	2.4	15				
CV-080	CV-080K	CV-080B	CV-080KB	80	3 1/8"	2.5	16				
CV-094	CV-094K	CV-094B	CV-094KB	96	3 3/4"	2.5	21				
CV-100	CV-100K	CV-100B	CV-100KB	100	4"	2.5	22				
CV-120S	CV-120SK	CV-120SB	CV-120SKB	120	4 3/4"	2.5	28				
CV-140S	CV-140SK	CV-140SB	CV-140SKB	142	5 1/2"	2.5	35				
CV-150S	CV-150SK	CV-150SB	CV-150SKB	155	6 1/8"	2.5	39				
CV-165	CV-165K	CV-165B	CV-165KB	165	6 1/2"	2.5	43				
CV-200M	CV-200MK	CV-200MB	CV-200MKB	203	8"	2.5	55				
CV-250S	CV-250SK	CV-250SB	CV-250SKB	250	10"	2.5	68				
CV-300M		CV-300MB		300	11 7/8"	2.5	80				
CV-400S		CV-400SB		400	15 3/4"	2.5	116				
CV-120	CV-120K	CV-120B	CV-120KB	120	4 3/4"	3.2	27			40	18
CV-140	CV-140K	CV-140B	CV-140KB	142	5 1/2"	3.2	34				
CV-150	CV-150K	CV-150B	CV-150KB	150	6"	3.6	36				
CV-180	CV-180K	CV-180B	CV-180KB	180	7"	3.6	46				
※CV-180T	CV-180TK	CV-180TB	CV-180TKB	180	7"	3.6	46				
CV-200S	CV-200SK	CV-200SB	CV-200SKB	203	8"	3.2	53				
CV-200A	CV-200AK	CV-200AB	CV-200AKB	203	8"	3.6	52				
CV-250M	CV-250MK	CV-250MB	CV-250MKB	250	10"	3.6	68				
CV-265	CV-265K	CV-265B	CV-265KB	265	10 1/2"	3.6	73				
CV-292	CV-292K	CV-292B	CV-292KB	292	11 1/2"	3.6	82				
CV-330		CV-330B		330	13"	3.6	93				
CV-368S		CV-368SB		368	14 1/2"	3.6	105				
CV-120L	CV-120LK	CV-120LB	CV-120LKB	120	4 3/4"	4.8	27	50	22		
CV-160L	CV-160LK	CV-160LB	CV-160LKB	160	6 1/4"	4.8	39				
CV-190	CV-190K	CV-190B	CV-190KB	190	7 1/2"	4.8	49				
※CV-190T	CV-190TK	CV-190TB	CV-190TKB	190	7 1/2"	4.8	49				
CV-200	CV-200K	CV-200B	CV-200KB	203	8"	4.6	52				
CV-200D	CV-200DK	CV-200DB	CV-200DKB	203	8"	4.8	52				

※ CVT-070 doesn't have minimum bundle diameter. ※ CV-200T Tail ※ CV-180T Tail CVT-100

0301 KSS NYLON CABLE TIE




Item No.				Length		W	Max. Bundle Dia.	Min. LoopTensile Strength		
Natural		Black						lbs	kgs	
100pcs	1000pcs	100pcs	1000pcs	mm	inch					
※CV-200T	CV-200TK	CV-200TB	CV-200TKB	203	8"	4.6	52	50	22	STANDARD
CV-250	CV-250K	CV-250B	CV-250KB	250	10"	4.8	68			
CV-280	CV-280K	CV-280B	CV-280KB	280	11"	4.8	77			
CV-300S		CV-300SB		300	11 7/8"	4.8	83			
CV-310		CV-310B		310	12"	4.8	86			
CV-350		CV-350B		350	13 3/4"	4.6	98			
CV-368		CV-368B		368	14 1/2"	4.8	105			
CV-385		CV-385B		385	15 3/16"	4.8	110			
CV-400		CV-400B		400	15 3/4"	4.6	116			
CV-432		CV-432B		432	17"	4.8	125			
CV-450M		CV-450MB		450	17 3/4"	4.8	131			
CV-500		CV-500B		500	19 11/16"	4.8	147			
CV-550S		CV-550SB		550	21 11/16"	4.8	162			
CV-610S		CV-610SB		610	24"	4.8	181			
CV-635S		CV-635SB		635	25"	4.8	189			
NEW CV-730S		CV-730SB		730	28 3/4"	4.8	219			
CV-914S		CV-914SB		914	36"	4.8	278			
CV-380S		CV-380SB		380	15"	6.4	108	100	45	HEAVY DUTY
CV-750		CV-750B		750	29 1/2"	7.5	223	120	55	
CV-120LL	CV-120LLK	CV-120LLB	CV-120LLKB	120	4 3/4"	7.6	22			
CV-150L	CV-150LK	CV-150LB	CV-150LKB	150	6"	7.6	32			
CV-200L	CV-200LK	CV-200LB	CV-200LKB	203	8"	7.6	52			
CV-240L	CV-240LK	CV-240LB	CV-240LKB	240	9 7/16"	7.6	61			
CV-250L		CV-250LB		250	10"	7.6	64			
CV-280L	CV-280LK	CV-280LB	CV-280LKB	280	11"	7.6	74			
CV-300		CV-300B		300	11 7/8"	7.6	80			
CV-340		CV-340B		340	13 1/2"	7.6	92			
CV-360		CV-360B		360	14 3/16"	7.6	99			
CV-370		CV-370B		370	14 9/16"	7.6	101			
CV-380		CV-380B		380	15"	7.6	105			
CV-610M		CV-610MB		610	24"	7.6	177			
CV-380L		CV-380LB		380	15"	8.0	105			
CV-450		CV-450B		450	17 3/4"	8.0	128			
CV-500L		CV-500LB		500	19 11/16"	8.0	143			
CV-550		CV-550B		550	21 11/16"	8.0	160			
CV-450L		CV-450LB		450	17 3/4"	9.0	128			
CV-550D		CV-550DB		550	21 11/16"	9.0	160			
CV-610		CV-610B		610	24"	9.0	177			
CV-685		CV-685B		685	27"	9.0	202			
CV-710		CV-710B		710	28"	9.0	209			
CV-762		CV-762B		762	30"	9.0	227			
CV-812		CV-812B		812	32"	9.0	243			
CV-914		CV-914B		914	36"	9.0	275			
CV-940		CV-940B		940	37"	9.0	284			
CV-1168		CV-1168B		1168	46"	9.0	356			
CV-1219		CV-1219B		1219	48"	9.0	372			
CV-1500		CV-1500B		1500	59"	9.0	462			
CV-550L		CV-550LB		550	21 11/16"	12.7	159	250	114	

Wiring Ducts
Cable Markers
Cable Ties
Wrapping Bands
Cable Clamps & Tie Mounts
Glands, Bushings
Conduits
Bushings
Wire Connectors
Tubes
Cable Clips
PCB Parts
Fasteners

0301 KSS SUPER STRENGTH NYLON CABLE TIE



- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Color: Standard color is natural, black, other special colors are available upon request.
- Feature: Low Smoke and Halogen Free cable tie suitable for various industry, also household DIY and gardening.
Max. operating temperature up to 85°C
- Application: One piece self-lock cable tie save the time and make effective for installation.



Item No.				Length		W	Max. Bundle Dia.	Min. LoopTensile Strength	
Natural		Black		mm	inch	mm	mm	lbs	kgs
100pcs	1000pcs	100pcs	1000pcs						
CV-200Z	CV-200ZK	CV-200ZB	CV-200ZKB	200	8"	4.6	48	75	34
CV-280Z	CV-280ZK	CV-280ZB	CV-280ZKB	280	11"	4.8	70		
CV-300SZ		CV-300SZB		300	11 7/8"	4.8	74		
CV-368Z		CV-368ZB		368	14 1/2"	4.8	94		
※CV-300STZ		CV-300STZB		300	11 7/8"	4.8	83	80	36

※ CV-300STZ Tail


0301 KSS NYLON CABLE TIE



HVAC Duct Straps

UL 181B-C for use with UL non-metallic air ducts and air connectors.
Recommended for use with R-6 and R-8 flex duct.

- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Color: Standard color is natural, black, other special colors are available upon request.
- Feature: Low Smoke and Halogen Free cable tie suitable for various industry, also household DIY and gardening.
Max. operating temperature up to 85°C
- Application: One piece self-lock cable tie save the time and make effective for installation.




Item No.			Length		W	Max. Bundle Dia.	Min. LoopTensile Strength	
Natural	Black	Weather Resistant	mm	inch	mm	mm	lbs	kgs
100pcs	100pcs	100pcs						
CV-914	CV-914B	CV-914W	914	36"	9	275	175	80
CV-940	CV-940B	CV-940W	940	37"	9	284		
CV-1219	CV-1219B	CV-1219W	1219	48"	9	372		

0301 KSS METAL DETECTABLE CABLE TIE



- Material: UL94HB flame rated Nylon 66 with metal powder.
- Color: Blue, Special color upon request.
- Application: One piece self-lock cable tie for quick installation.
- Feature: Apply for Food and Medical industrial, FDA standard, can be detected by Metal sensor.





Item No.	Length		W	Max. Bundle Dia.	Min. LoopTensile Strength		Packing
	mm	inch	mm	mm	lbs	kgs	
CV-100MD	100	4"	2.5	22	14	6	100pcs
CV-150MD	150	6"	3.6	36	25	11	
CV-200MD	203	8"	4.6	52	34	15	
CV-200MMD	203	8"	2.5	55	14	6	
CV-250MD	250	10"	4.8	68	34	15	
CV-280MD	280	11"	4.8	77	34	15	
CV-380MD	380	15"	7.6	105	88	39	
CV-385MD	385	15 3/16"	4.8	110	34	15	
CV-400MD	400	15 3/4"	4.6	116	34	15	

0301 KSS EXTRA HIGH TEMPERATURE CABLE TIE



- Material: UL94V-2 flame rated, UL approved Nylon 46.
- Color: Light Brown.
- Application: One piece self-lock cable tie save the time and make effective for installation.
- Feature : Designed for extra high-temperature up to 150°C.

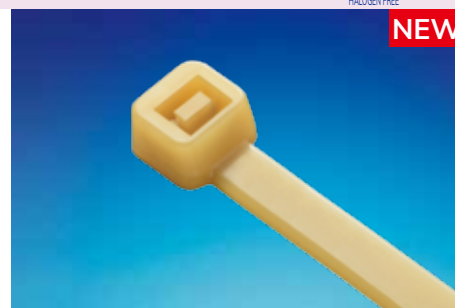


Item No.	Length		W	Max. Bundle Dia.	Min. LoopTensile Strength		Packing
	mm	inch	mm	mm	lbs	kgs	
CV-100N46	100	4"	2.5	22	18	8	100pcs
CV-150N46	150	6"	3.6	36	40	18	
CV-200N46	203	8"	4.6	52	50	22	
CV-300SN46	300	11 7/8"	4.8	83	50	22	
CV-380N46	380	15"	7.6	105	120	55	
CV-385N46	385	15 3/16"	4.8	110	50	22	

0301 KSS HEAT STABILIZED CABLE TIE



- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Color: Light green (standard), black color available.
- Feature: Designed for high-temperature up to 105°C.




Item No.		Length		W	Max. Bundle Dia.	Min. LoopTensile Strength		Packing
Light green (standard)	Black	mm	inch	mm	mm	lbs	kgs	
CV-100HS	CV-100HSBK	100	4"	2.5	22	18	8	100pcs
CV-140SHS	CV-140SHSBK	142	5 1/2"	2.5	35	18	8	
CV-150HS	CV-150HSBK	150	6"	3.6	36	40	18	
CV-200MHS	CV-200MHSBK	203	8"	2.5	55	18	8	
CV-200HS	CV-200HSBK	203	8"	4.6	52	50	22	
CV-250HS	CV-250HSBK	250	10"	4.8	68	50	22	
CV-300SHS	CV-300SHSBK	300	11 7/8"	4.8	83	50	22	
CV-300HS	CV-300HSBK	300	11 7/8"	7.6	80	120	55	
CV-368HS	CV-368HSBK	368	14 1/2"	4.8	105	50	22	
CV-380HS	CV-380HSBK	380	15"	7.6	105	120	55	

0301 KSS NYLON 612 CABLE TIE



- Material: UL94HB flame rated Nylon 612.
- Color: Black
- Application: UV Resistant, Chemical Resistant (zinc chloride, hydrocarbons, salts, bases, acid rain, etc.)
- Feature: Suitable for solar industry (wiring management for galvanized surfaces), and for the environment requiring resistance to outdoors aging and corrosion.




Item No.	Length		W	Max. Bundle Dia.	Min. LoopTensile Strength		Packing
	mm	inch	mm	mm	lbs	kgs	
CV-100N612	100	4"	2.5	22	18	8	100pcs
CV-150N612	150	6"	3.6	36	40	18	
CV-200N612	203	8"	4.6	52	50	22	
CV-250N612	250	10"	4.8	68	50	22	
CV-300SN612	300	11 7/8"	4.8	83	50	22	
CV-368N612	368	14 1/2"	4.8	105	50	22	
CV-370N612	370	14 9/16"	7.6	101	120	55	

0301 KSS FLAME RETARDANT CABLE TIE



- Material: **UL94V-0** flame rated, UL approved Nylon 66.
- Color : White (standard), black color available.
- Feature : **94V-0** Flame Retardant.




Item No.	Length		W	Max. Bundle Dia.	Min. LoopTensile Strength		Packing
	mm	inch	mm	mm	lbs	kgs	
CV-100V0	100	4"	2.5	22	18	8	100pcs
CV-150V0	150	6"	3.6	36	40	18	
CV-200MV0	203	8"	2.5	55	18	8	
CV-200V0	203	8"	4.6	52	50	22	
CV-300SV0	300	11 7/8"	4.8	83	50	22	
CV-368V0	368	14 1/2"	4.8	105	50	22	
CV-380V0	380	15"	7.6	105	120	55	

0301 KSS POLYPROPYLENE CABLE TIE



- Material: PP.
- Color: Black (natural color upon request)
- Feature: To use at chemical industry, provide better chemical resistant compare with standard cable tie.




Item No.	Length		W	Max. Bundle Dia.	Min. LoopTensile Strength		Packing
	mm	inch	mm	mm	lbs	kgs	
CV-150PPBK	150	6"	3.6	36	18	8	100pcs
CV-200PPBK	200	8"	4.6	52	22	10	
CV-240LPPBK	240	9 7/16"	7.6	61	51	23	
CV-250PPBK	250	10"	4.8	68	22	10	
CV-300PPBK	300	11 7/8"	7.6	80	51	23	
CV-380PPBK	380	15"	7.6	105	51	23	
CV-550PPBK	550	21 11/16"	8.0	160	51	23	

0301 KSS COLD WEATHER CABLE TIE


- Material: UL94HB flame rated Nylon 66.
- Color: Black.
- Application: One piece self-lock cable tie save the time and make effective for installation.
- Feature: 1. Excellent resistance to low temperature and UV light.
2. Min. installation temperature: -20°C.
Min. operating temperature: -40°C.

Item No.	Length		W	Max. Bundle Dia.	Min. Loop Tensile Strength		Packing
	mm	inch	mm	mm	lbs	kgs	
CV-150CWBK	150	6"	3.6	36	40	18	100pcs
CV-200DCWBK	203	8"	4.8	52	50	22	
CV-250CWBK	250	10"	4.8	68	50	22	
CV-292CWBK	292	11 1/2"	3.6	82	40	18	
CV-300SCWBK	300	11 7/8"	4.8	83	50	22	
CV-368CWBK	368	14 1/2"	4.8	105	50	22	
CV-370CWBK	370	14 9/16"	7.6	101	120	55	
CV-380CWBK	380	15"	7.6	105	120	55	
CV-385CWBK	385	15 3/16"	4.8	110	50	22	
CV-450CWBK	450	17 3/4"	8.0	128	120	55	




0301 KSS EXTRA HEAVY DUTY CABLE TIE

- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Extra heavy duty ties for application where higher tensile strength is needed.

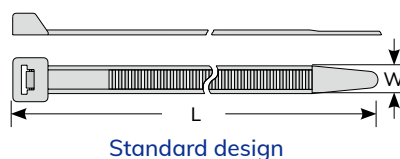

Standard design

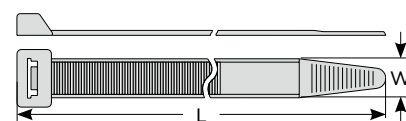

CV-255XXL

Item No.	Length		W	Max. Bundle Dia.	Min. LoopTensile Strength		Packing	EXTRA HEAVY DUTY
	mm	inch	mm	mm	lbs	kgs		
CV-230XL	230	9"	12.7	57	250	114	100 pcs	
CV-255XXL	254	10"	17.8	42	120	55		
CV-280XL	280	11"	12.7	73	250	114		
CV-380XL	380	15"	12.7	105	250	114		
CV-480XL	480	18 7/8"	12.7	137	250	114		
CV-550L	550	21 11/16"	12.7	159	250	114		
CV-580XL	580	22 7/8"	12.7	169	250	114		
CV-730XL	730	28 3/4"	12.7	216	250	114		
CV-880XL	880	34 11/16"	12.7	264	250	114		
CV-1030XL	1030	40 1/2"	12.7	312	250	114		
NEW  CV-1530XLT	1530	60 1/4"	12.7	473	250	114		


CV-1530XLT Tail



0301 KSS UV RESISTANT SUPER STRENGTH NYLON CABLE TIE



- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Color: UV resistant black.
- Carbon black added for excellent resistance to ultra violet in outdoor usage.
- Prolongs useful life of cable tie under sunshine/outdoor application.
- UV resistant cable tie: for outdoor use with UV feature.
- ※ Please make an inquiry if the environment not just UV.



Item No.		Length		W	Max. Bundle Dia.	Min. Loop Tensile Strength	
100pcs	1000pcs	mm	inch	mm	mm	lbs	kgs
CV-200ZW	CV-200ZKW	203	8"	4.6	48	75	34
CV-280ZW	CV-280ZKW	280	11"	4.8	70		
CV-300SZW		300	11 7/8"	4.8	74		
CV-368ZW		368	14 1/2"	4.8	94		
※CV-300STZW		300	11 7/8"	4.8	83	80	36

※CV-300STZW Tail

0302 KSS TIE GUN

- Economical, pocket type
- Twist to cut surplus tie end after tightening cable. (TG-6)
- Tie gun for stainless steel tie. (TG-20, TG-21)




Item No.	Feature	Suitable Tie Width mm	Weight	Film
TG-3	Automatically cutting when tightens up. Quickly tightens and cuts cable tie tail for one step application. Excellent for industrial assembly. tensile adjustable type.	2.2 ~ 4.8	300 g	
TG-5	Automatically cutting when tightens up. Quickly tightens and cuts cable tie tail for one step application. Excellent for industrial assembly. tensile adjustable type	2.2 ~ 4.8	333 g	
TG-6	Twist tie gun after tighten to cut off cable tie tail manually.	2.5 ~ 5.0	60 g	
TG-7	Automatically cutting when tightens up. Quickly tightens and cuts cable tie tail for one step application. Excellent for industrial assembly. tensile adjustable type.	2.5 ~ 5.0	275 g	
TG-9	Pull the handle to tighten up cable tie. Press to cut off the tail. Designed for cable tie above 5.0mm width.	2.5 ~ 10.0	275 g	
TG-10	Automatically cutting when tightens up. Quickly tightens and cuts cable tie tail for one step application. Excellent for industrial assembly.	4.8 ~ 13.0	320 g	
NEW TG-20	Suitable for stainless steel cable tie. Automatically cutting when tightens up. Quickly tightens and cuts cable tie tail for one step application. Excellent for industrial assembly. tensile adjustable type.	4.5 ~ 7.9	554 g	
TG-21	Suitable for stainless steel cable tie. Pull the handle to tighten up cable tie. Press to cut off the tail.	4.6 ~ 12.0	635 g	



0301 KSS UV RESISTANT NYLON CABLE TIE



- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Color: UV resistant black.
- Carbon black added for excellent resistance to ultra violet in outdoor usage.
- Prolongs useful life of cable tie under sunshine/outdoor application.
- UV resistant cable tie: for outdoor use with UV feature.
- ※Please make an inquiry if the environment not just UV.

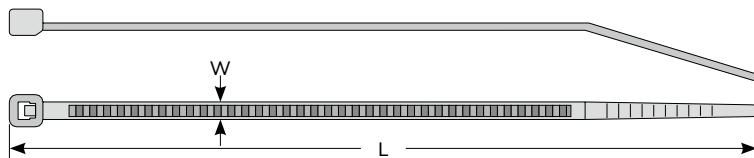

Item No.		Length		W	Max. Bundle Dia.	Min. LoopTensile Strength		
100pcs	1000pcs	mm	inch	mm	mm	lbs	kgs	
※CVT-070W	CVT-070KW	71	2 13/16"	1.6	16	7	3	MINIATURE
※CVT-100W	CVT-100KW	103	4"	1.95	22	11	5	
CV-060W	CV-060KW	63.7	2 1/2"	2.4	11	18	8	
CV-075W	CV-075KW	75	3"	2.4	15			
CV-080W	CV-080KW	80	3 1/8"	2.5	16			
CV-094W	CV-094KW	96	3 3/4"	2.5	21			
CV-100W	CV-100KW	100	4"	2.5	22			
CV-120SW	CV-120SKW	120	4 3/4"	2.5	28			
CV-140SW	CV-140SKW	142	5 1/2"	2.5	35			
CV-150SW	CV-150SKW	155	6 1/8"	2.5	39			
CV-165W	CV-165KW	165	6 1/2"	2.5	43			
CV-200MW	CV-200MKW	203	8"	2.5	55			
CV-250SW	CV-250SKW	250	10"	2.5	68			
CV-300MW		300	11 7/8"	2.5	80			
CV-400SW		400	15 3/4"	2.5	116			
CV-120W	CV-120KW	120	4 3/4"	3.2	27	40	18	INTERMEDIATE
CV-140W	CV-140KW	142	5 1/2"	3.2	34			
CV-150W	CV-150KW	150	6"	3.6	36			
CV-180W	CV-180KW	180	7"	3.6	46			
※CV-180TW	CV-180TKW	180	7"	3.6	46			
CV-200SW	CV-200SKW	203	8"	3.2	53			
CV-200AW	CV-200AKW	203	8"	3.6	52			
CV-250MW	CV-250MKW	250	10"	3.6	68			
CV-265W	CV-265KW	265	10 1/2"	3.6	73			
CV-292W	CV-292KW	292	11 1/2"	3.6	82			
CV-330W		330	13"	3.6	93			
CV-368SW		368	14 1/2"	3.6	105			
CV-120LW	CV-120LKW	120	4 3/4"	4.8	27	50	22	STANDARD
CV-160LW	CV-160LKW	160	6 1/4"	4.8	39			
CV-190W	CV-190KW	190	7 1/2"	4.8	49			
※CV-190TW	CV-190TKW	190	7 1/2"	4.8	49			
CV-200W	CV-200KW	203	8"	4.6	52			
CV-200DW	CV-200DKW	203	8"	4.8	52			
※CV-200TW	CV-200TKW	203	8"	4.6	52			
CV-250W	CV-250KW	250	10"	4.8	68			

※ CVT-070W doesn't have minimum bundle diameter. ※ CV-200TW Tail  ※ CV-180TW Tail  CV-190TW

0301 KSS UV RESISTANT NYLON CABLE TIE



Item No.		Length		W	Max. Bundle Dia.	Min. LoopTensile Strength		
100pcs	1000pcs	mm	inch		mm	lbs	kgs	
CV-280W	CV-280KW	280	11"	4.8	77	50	22	STANDARD
CV-300SW		300	11 7/8"	4.8	83			
CV-310W		310	12"	4.8	86			
CV-350W		350	13 3/4"	4.6	98			
CV-368W		368	14 1/2"	4.8	105			
CV-385W		385	15 3/16"	4.8	110			
CV-400W		400	15 3/4"	4.6	116			
CV-432W		432	17"	4.8	125			
CV-450MW		450	17 3/4"	4.8	131			
CV-500W		500	19 11/16"	4.8	147			
CV-550SW		550	21 11/16"	4.8	162			
CV-610SW		610	24"	4.8	181			
CV-635SW		635	25"	4.8	189			
NEW CV-730SW	CV-120LLKW CV-150LKW CV-200LKW CV-240LKW CV-250LW CV-280LKW CV-300W CV-340W CV-360W CV-370W CV-380W CV-610MW CV-380LW CV-450W CV-500LW CV-550W CV-450LW CV-550DW CV-610W CV-685W CV-710W CV-762W CV-812W CV-914W CV-940W CV-1168W CV-1219W CV-1500W CV-550LW	730	28 3/4"	4.8	219	120	55	HEAVY DUTY
CV-914SW		914	36"	4.8	278			
CV-380SW		380	15"	6.4	108			
CV-750W		750	29 1/2"	7.5	223			
CV-120LLW		120	4 3/4"	7.6	22			
CV-150LW		150	6"	7.6	32			
CV-200LW		203	8"	7.6	52			
CV-240LW		240	9 7/16"	7.6	61			
CV-250LW		250	10"	7.6	64			
CV-280LW		280	11"	7.6	74			
CV-300W		300	11 7/8"	7.6	80			
CV-340W		340	13 1/2"	7.6	92			
CV-360W		360	14 3/16"	7.6	99			
CV-370W		370	14 9/16"	7.6	101			
CV-380W		380	15"	7.6	105			
CV-610MW		610	24"	7.6	177			
CV-380LW		380	15"	8.0	105			
CV-450W		450	17 3/4"	8.0	128			
CV-500LW		500	19 11/16"	8.0	143			
CV-550W		550	21 11/16"	8.0	160			
CV-450LW		450	17 3/4"	9.0	128			
CV-550DW		550	21 11/16"	9.0	160			
CV-610W		610	24"	9.0	177			
CV-685W		685	27"	9.0	202			
CV-710W		710	28"	9.0	209			
CV-762W		762	30"	9.0	227			
CV-812W		812	32"	9.0	243			
CV-914W		914	36"	9.0	275			
CV-940W		940	37"	9.0	284			
CV-1168W		1168	46"	9.0	356			
CV-1219W		1219	48"	9.0	372			
CV-1500W		1500	59"	9.0	462			
CV-550LW		550	21 11/16"	12.7	159	250	114	

Wiring Ducts
Cable Markers
Cable Ties
Wrapping Bands
Cable Clamps & Tie Mounts
Glands, Bushings
Conduits
Bushings
Wire Connectors
Tubes
Cable Clips
PCB Parts
Fasteners