

0305 KSS MOUNTING CABLE TIE




- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Color: Natural (for black. Please add "BK" to Item no.)
- The cable tie can be secured to panel with a single bolt.

Item No.	Length		W	A	Max. Bundle Dia.	Min. LoopTensile Strength		Packing
	mm	inch	mm	mm	mm	lbs	kgs	
TCV-100	110	4 3/8"	2.5	3.2	25	18	8	100pcs
TCV-155	171.5	6 11/16"	3.7	5.0	40	40	18	
TCVS-170	171.5	6 11/16"	3.7	4.0	40	40	18	
TCV-205	219	8 11/16"	4.2	5.0	52	50	22	
TCV-300	300	11 7/8"	4.8	4.8	85	50	22	
TCV-300L	300	12 1/2"	7.8	6.0	80	120	55	
TCV-370	370	14 1/2"	4.8	4.8	102	50	22	
TCV-400	400	15 3/4"	7.9	6.0	112	120	55	




NEW SUPER STRENGTH

Item No.	Length		W	A	Max. Bundle Dia.	Min. LoopTensile Strength		Packing
	mm	inch	mm	mm	mm	lbs	kgs	
TCV-205DZ	219	8 11/16"	4.8	5.0	52	75	34	100pcs

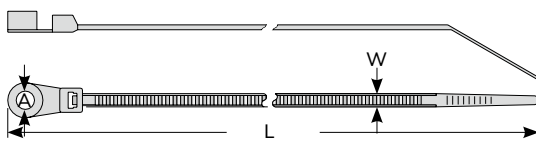

Standard design

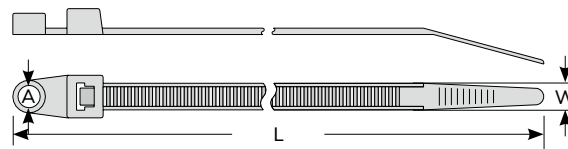

TCV-300L, TCV-400

0309 KSS DOUBLE LOOP MOUNTING TIE




- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Color: Black.
- Application: double head design to secure wires, tubing or hoses parallelly separated.
- Feature: two way insertion head design to facilitate fast wire, hoses, tubing bundling from either direction.

Item No.	L		L1		W	Mounting Hole Dia.	Max. Bundle Dia.	Min. LoopTensile Strength		Packing
	mm	inch	mm	inch	mm	mm	mm	lbs	kgs	
DMT-500XLBK	500	19 11/16"	250	10"	12.7	6.2	60	250	114	20pcs



Film

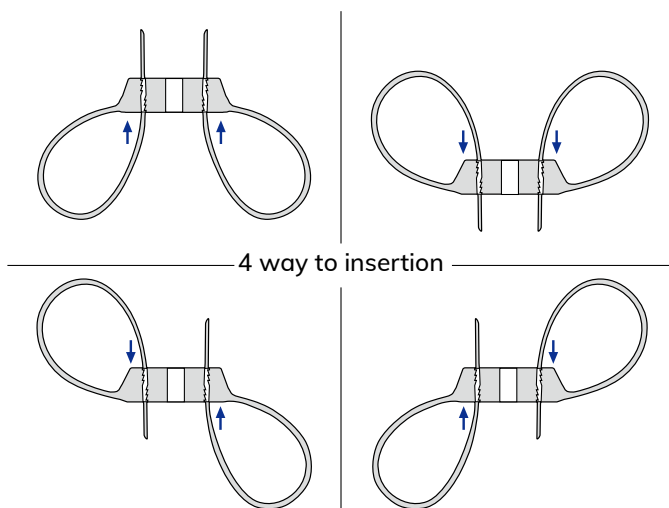

4 way to insertion

