
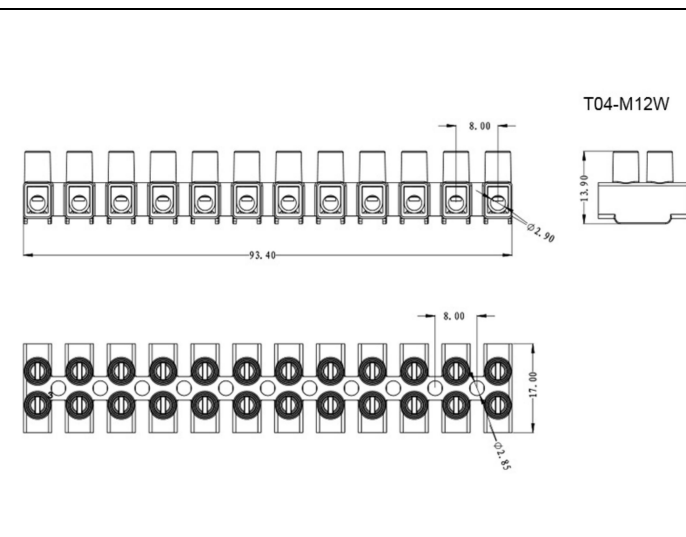


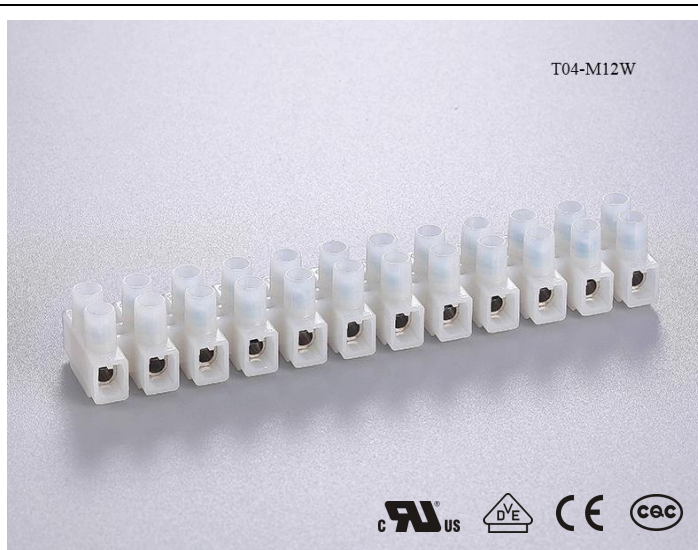

Item No.		T04-M12W(A)	
Electrical Data			
		IEC/EN	UL
Rated Voltage (V)		450	600
Rated Current (A)		24	FW1: 20
			FW2: 15
Ambient Temperature			
	Polyamide 66 (V-2)	T135	105℃
Connection Data			
		IEC/EN	UL
Cross Section	Solid conductor	0.5-2.5mm²	AWG 14-20
	Stranded conductor	0.5-2.5mm²	AWG 14-20
	Flexible conductor	0.5-2.5mm²	-
Strip length (mm)		5-6	
Means of connection		screw fixed	
Screw		M2.6	
Rewirable		√	
Number of terminals		multiway	
Number of connection points		1-12	
Means of Fixing			
screw fixed			
Materials			
Insulation Materials	Designation	Polyamide 66	
	Flammability class	UL 94V-2	
Clamping Unit		brass, stainless steel	
Compatible Products			
Junction boxes		405, TB-01	
Packing Quantity (pcs/carton)			
500			
Jiangmen Krealux Electrical Appliances Co., Ltd.			
 BELEKS		Tel: 86-750-3782910	
		Fax: 86-750-3893078	
		Email: sales02@krealux.com	
		www.krealux.com	