


0604 KSS NYLON CABLE GLAND

- Material : UL94V-2 flame rated, UL approved Nylon 66, TPE for Seal, PVC for Washer.
- Color: Black, available in other colors.
- Suit a variety of applications, and diverse industries.
- Function : Mount gland to pre-drilled panel hole, use locknut to fix gland on board, insert the cables in the seal, and then tighten up the nut to hold cables in position.
- Feature : Simply and quickly fixed, high degree of the protection IP68 preventing dust and water.
- Part number AG-D series, smaller size, suit for smaller cabinet.
- Available to order the accessories separately. Follow the drawing and add the letter to the suffix part number, L for locknut, W for washer, B for gland body, S for seal, N for nut. For example, AGL-12 if you would like to only order locknut for M12x1.25

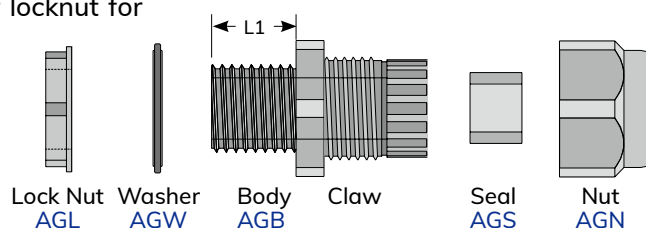

METRIC THREAD ※Protection : IP68

UNIT : mm

Item No.	Thread	Thread O.D.	Mounting Hole	L1	Cable Range	Packing
AG-12	M12x1.25	12	12+0.2	7.9	3~6.5	50pcs
AG-12L	M12x1.5	12	12+0.2	7.9	3~6.5	
AG-12H	M12x1.25	12	12+0.2	7.9	3~7.5	
AG-12HL	M12x1.25	12	12+0.2	9.0	3~7.5	
AG-16	M16x1.5	16	16+0.2	15.5	5~10	
AG-16S	M16x1.5	16	16+0.2	10.0	5~10	
AG-20	M20x1.5	20	20+0.2	15.0	10~14	
AG-20S	M20x1.5	20	20+0.2	10.0	10~14	
AG-25	M25x1.5	25	25+0.3	15.2	13~18	
AG-25S	M25x1.5	25	25+0.3	10.0	13~18	
AG-32	M32x1.5	32	32+0.3	14.7	18~25	25pcs
AG-40	M40x1.5	40	40+0.3	18.4	22~32	10pcs
AG-50	M50x1.5	50	50+0.3	17.8	30~38	
AG-63	M61x1.5	61	61+0.3	18.5	34~44	
AG-63M	M63x1.5	63	63+0.3	18.5	34~44	
AG-63L	M63x1.5	63	63+0.3	25.4	42~50	2pcs
AG-75	M75x2.0	75	75+0.4	25.1	56~66	


Part number AG-D series, smaller size, suit for smaller cabinet.

AG-12D	M12x1.5	12	12+0.2	8.0	3~6	50pcs
AG-16D	M16x1.5	16	16+0.2	8.2	5~10	
AG-20D	M20x1.5	20	20+0.2	10.0	8~12	
AG-25D	M25x1.5	25	25+0.3	10.0	11~17	
AG-32D	M32x1.5	32	32+0.3	10.0	15~21	25pcs
AG-40D	M40x1.5	40	40+0.3	10.0	20~28	10pcs
AG-50D	M50x1.5	50	50+0.3	12.0	27~35	
AG-63D	M63x1.5	63	63+0.3	16.7	32~42	

0604 KSS NYLON CABLE GLAND



- Material : UL94V-2 flame rated, UL approved Nylon 66, TPE for Seal, PVC for Washer.
- Color: Black, available in other colors.
- Suit a variety of applications, and diverse industries.
- Function : Mount gland to pre-drilled panel hole, use locknut to fix gland on board, insert the cables in the seal, and then tighten up the nut to hold cables in position.
- Feature : Simply and quickly fixed, **Body and Claw are separate.**
- Available to order the accessories separately. Follow the drawing and add the letter to the suffix part number, L for locknut, W for washer, B for gland body, S for seal, C for claw, N for nut. For example, CAGL-12 if you would like to only order locknut for M12x1.25

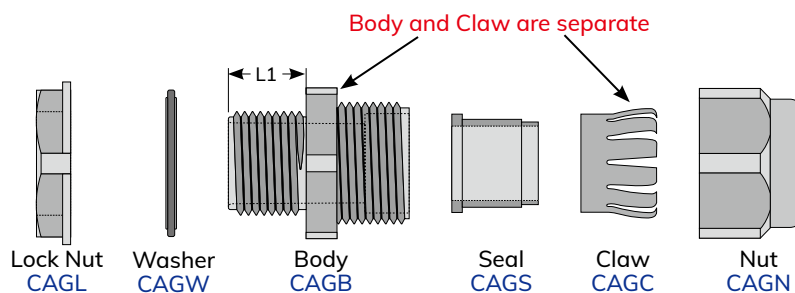

METRIC THREAD ※Protection : IP68


UNIT : mm

Item No.	Thread	Thread O.D.	Mounting Hole	L1	Cable Range	Packing
CAG-12	M12x1.25	12	12.0+0.2	8.1	3~6.5	50pcs
CAG-16	M16x1.5	16	16.0+0.2	15.5	5~10	
CAG-20	M20x1.5	20	20.0+0.2	15.0	10~14	
CAG-25	M25x1.5	25	25.0+0.3	15.3	13~18	
CAG-32	M32x1.5	32	32.0+0.3	15.0	18~25	25pcs
CAG-40	M40x1.5	40	40.0+0.3	18.2	22~32	10pcs
CAG-50	M50x1.5	50	50.0+0.3	18.2	30~38	
CAG-63	M63x1.5	63	63.0+0.3	18.2	34~44	

0606 KSS NYLON CABLE GLAND



- Material: UL94V-2 flame rated, UL approved Nylon 66, TPE for Seal, PVC for Washer.
- Color: Black, available in other colors.
- Suit a variety of applications, and diverse industries.
- Function :Mount gland to pre-drilled panel hole, use locknut to fix gland on board, insert the cables in the seal, and then tighten up the nut to hold cables in position.
- Feature : Simply and quickly fixed, high degree of the protection IP68 preventing dust and water.
- Available to order the accessories separately. Follow the drawing and add the letter to the suffix part number, L for locknut, W for washer, B for gland body, S for seal, N for nut. For example, EGL-7 if you would like to only order locknut for PG7.
- ※ EG-7LS has smaller nut.

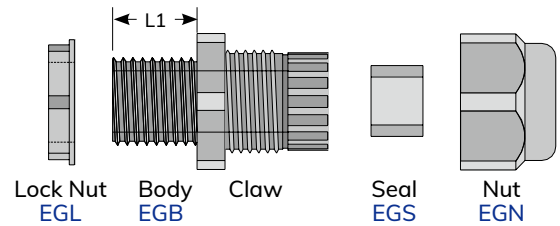

PG THREAD (DIN STANDARD) ※Protection : IP68 (only if the washer is assembled)


UNIT : mm

Item No.	Thread	Thread O.D.	Mounting Hole	L1	Cable Range	Packing	
EG-7	PG7	12.5	12.5+0.2	7.9	3~6.5	WITHOUT WASHER	50pcs
 EG-7LS	PG7	12.5	12.5+0.2	7.9	3~6.5		
 EG-9	PG9	15.2	15.2+0.2	8.2	4~8		
 EG-9L	PG9	15.2	15.2+0.2	14.7	4~8		
 EG-11	PG11	18.6	18.6+0.2	7.9	5~10		
 EG-11L	PG11	18.6	18.6+0.2	14.9	5~10		
 EG-13.5	PG13.5	20.4	20.4+0.2	8.9	6~12		
 EG-13.5L	PG13.5	20.4	20.4+0.2	15.8	6~12		
 EG-16	PG16	22.5	22.5+0.2	9.8	10~14		
 EG-21	PG21	28.3	28.3+0.3	10.8	13~18		
 EG-29	PG29	37.0	37.0+0.3	10.8	18~25	25pcs	
 EG-36	PG36	47.0	47.0+0.3	15.0	22~32	10pcs	
EG-42	PG42	54.0	54.0+0.3	14.5	30~38		
EG-48	PG48	59.3	59.3+0.3	16.7	34~44		

0606 KSS NYLON CABLE GLAND



- Material: UL94V-2 flame rated, UL approved Nylon 66, TPE for Seal, PVC for Washer.
- Color: Black, available in other colors.
- Suit a variety of applications, and diverse industries.
- Function :Mount gland to pre-drilled panel hole, use locknut to fix gland on board, insert the cables in the seal, and then tighten up the nut to hold cables in position.
- Feature : Simply and quickly fixed, **Body and Claw are separate.**
- Available to order the accessories separately. Follow the drawing and add the letter to the suffix part number, L for locknut, W for washer, B for gland body, S for seal, C for claw, N for nut. For example, CEG-7 if you would like to only order locknut for PG7.

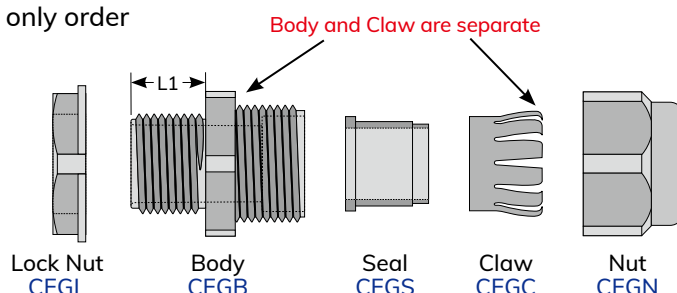

PG THREAD (DIN STANDARD) ※Protection : IP68 (only if the washer is assembled)

UNIT : mm

WASHER (DIN 913 AND) (in detection of 33 (only if the washer is assembled))						UNIT : mm	
Item No.	Thread	Thread O.D.	Mounting Hole	L1	Cable Range	Packing	
CEG-7	PG7	12.5	12.5+0.2	8.0	3~6.5	WITHOUT WASHER	50pcs
CEG-9	PG9	15.2	15.2+0.2	8.2	4~8		
CEG-11	PG11	18.6	18.6+0.2	8.2	5~10		
CEG-13.5	PG13.5	20.4	20.4+0.2	9.0	6~12		
CEG-16	PG16	22.5	22.5+0.2	9.9	10~14		
CEG-21	PG21	28.3	28.3+0.3	10.8	13~18		
CEG-29	PG29	37.0	37.0+0.3	10.8	18~25		25pcs
CEG-36	PG36	47.0	47.0+0.3	14.7	22~32		
CEG-42	PG42	54.0	54.0+0.3	14.7	30~38		10pcs
CEG-48	PG48	59.3	59.3+0.3	16.7	34~44		